



Unlimited
possibilities!

Access Lifts Limited
0843 216 0226
www.access-lifts.co.uk

Merley Hall Farm House, Willett Road, Ashington,
Wimborne, BH21 3DL

Registered in England No. 03231129

**GANSER**
STAIR LIFTS




For curves with constant slope

- the upper stainless steel tube can be used as handrail
- minimal construction lowness of 280 mm at parking position
- shapely construction - free choice of RAL-color or stainless steel design
- major security against vandalism at parking position
- fixation on the wall, single stilts or steel construction
- extensive control device, easy handling
- gentle in start, slower in curves
- platform size 1000 x 800 mm or construction for the staircase suitable

Standard:
automatic operation platform and security bar,
therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio,
emergency-call, folding seat, additional 3rd ramp,
emergency electrical power supply, outside useable,
handling on coil cable.

Special constructions on request.

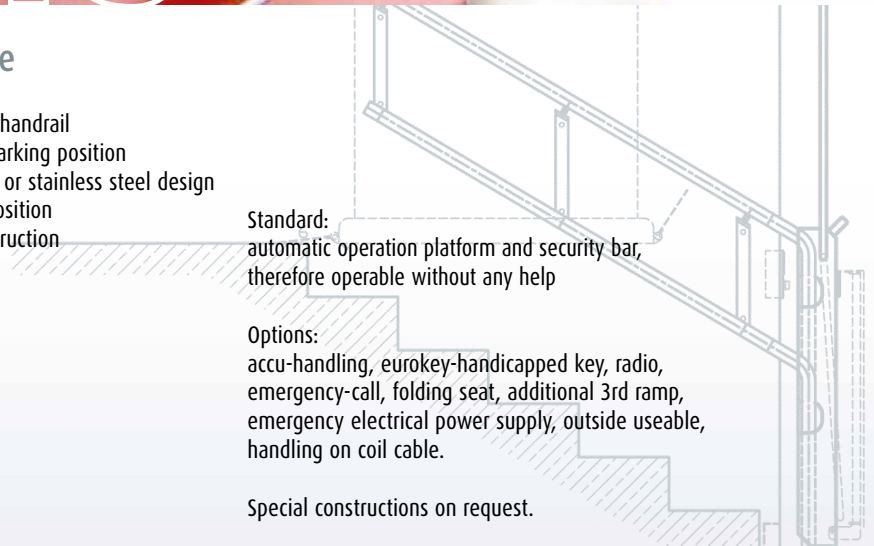

Technical details GTL 15


| | |
|--------------------|-------------------------------------|
| Max. capacity: | bis 300 kg |
| Speed: | max. 0,15 m/sek. (reduce in curves) |
| Electronic device: | 230 V / 50 Hz. |



GANSENER
TREPPENLIFTE

GTL 20

The lift for straight staircases

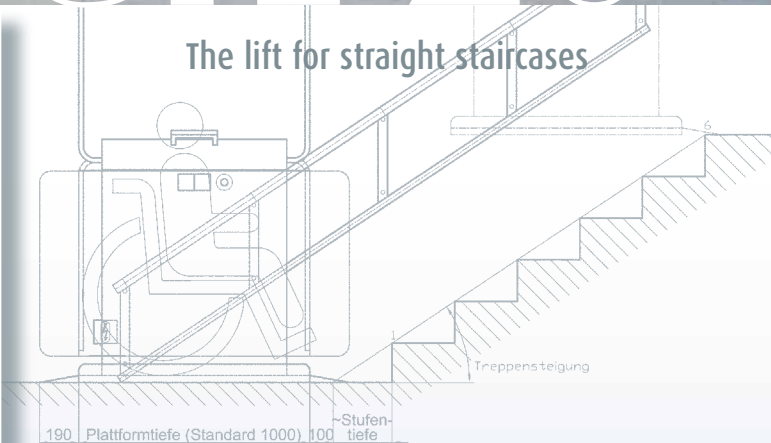

Standard:
automatic operation platform and security bar,
therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio,
emergency-call, folding seat, additional 3rd ramp,
emergency electrical power supply, outside useable,
handling on coil cable.

Special constructions on request.



Technical details GTL 20

Min. construction lowness of 225 mm

Max. capacity: bis 300 kg
Speed: max. 0,15 m/sek.
Electronic device: 230 V / 50 Hz.

GTL 30



The special lift for drives in different angles of inclination, curves and horizontal drives

- the upper stainless steel tube can also be used as handrail
- minimal construction lowness of 350 mm at parking position
- shapely construction - free choice of RAL-color or stainless steel design
- major security against vandalism at parking position
- gentle in start, slower in curves and change angle of inclination
- difficult lane runs possible
- platform size 1000 x 800 mm
or suitable construction for the staircase

Standard:
automatic operation platform and security bar, therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio, emergency-call, folding seat, additional 3rd ramp, emergency electrical power supply, outside useable, handling on coil cable.

Special constructions on request.

Technical details GTL 30

| | |
|--------------------|------------------|
| Max. capacity: | bis 300 kg |
| Speed: | max. 0,15 m/sek. |
| Electronic device: | 230 V / 50 Hz. |



GANSER

STAIR LIFTS

A-4171 St. Peter/Wbg., Markt 26
Tel. +43 (0) 72 82 / 80 71 • Fax +43 (0) 72 82 / 80 71-22
www.ganserlift.at • info@ganserlift.at

