

PVE37



Rated Load
205 kg



Panoramic view
360°



Unique Design



Vacuum
Technology



Installation
within 2-3 days



Plug&Play
Single phase 220v



Customizable
finishes



Minimal
maintenance



Eco-friendly



No pit
required



Maximum
Safety



General

External cylinder diameter (mm)	933
Rated load (kg)	205
Speed	<0.15m/s
Number of stops	2 to 5
Maximum total travel (m)	15

Doors

Available Door openings	0°, 90°, 270° and 180°
Default hinges position (from outside the cabin)	Right
Optional hinges position (from outside the cabin)	Left
Automatic door option	Yes
Door height (mm)	1970
Height upto top of the door closer (mm)	2025

Cabin

Internal cabin height (mm)	2007
Interior cabin diameter (mm)	
without columns	820
between columns	750
Entrance width opening (mm)	521
Electrical circuits with all controls in cabin	24V
Automatic Push (one-touch press)	Yes
Foldable cabin seat	Yes
Wheelchair accessible	Yes, with special reduced width wheelchair

Security



Automatic descent in the event of power failure	Yes
Mechanical emergency brakes	Yes
Overload limiting system	Yes
Alarm button	Yes
Telephone	Yes
Electromechanical interlocks at each landing	Yes

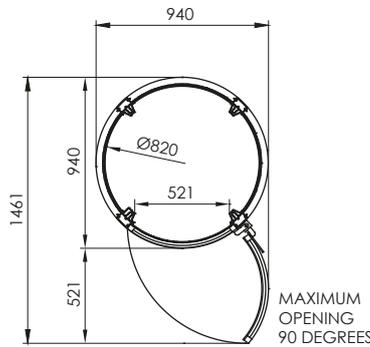
Installation requirements

Through floor perforation required diameter (mm)	990
Minimum height in upper floor (mm)	2450
Level ground	Yes

Electricity/Power

Power Supply	220V single-phase line of 3 (phase, neutral, earth) x 6mm (cross-section of each cable)
Maximum power	5kW
Required protection	25A Circuit Breaker

	Structure Colours	Cabin Floor	Ceiling Finishes
Standard Colours	 White	 Golden Brown	 Brushed
	 Bluish Grey	 Metallic	 Mirror
	 Light Grey	 Black	
	 Matte Black		
Special Colours	 Silver		
	 Taupe		



BOARDING OPTIONS

	GF	2	3	4	5
IN-LINE 0°					
180°					
270°					
90°					

